




Be ahead

PILLAR B




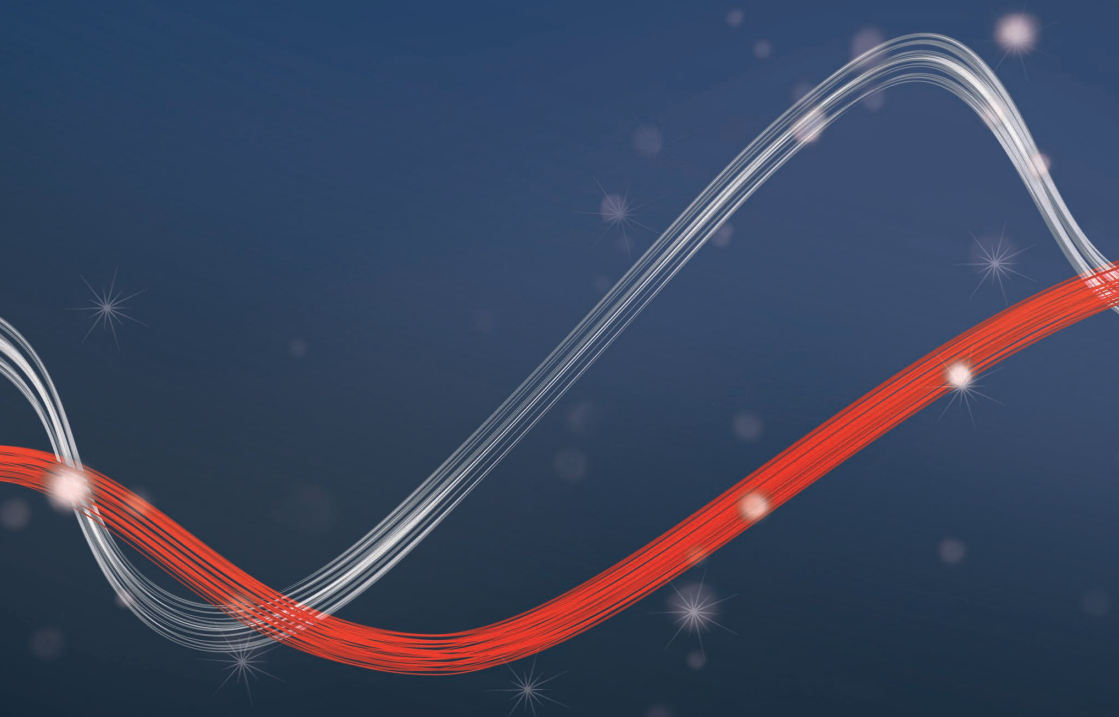


PILLAR B



Automatic hydraulic bollard



	PILLAR B 275/600.6C L	PILLAR B 275/600.6C LI	PILLAR B 275/600.6C L SD	PILLAR B 275/600.6C LI SD	PILLAR B 275/800.6C L	PILLAR B 275/800.6C LI	PILLAR B 275/800.6C L SD	PILLAR B 275/800.6C LI SD
Voltage	230 V							
Rod height	600 mm				800 mm			
Rod diameter	275							
Opening or closing time	5 sec.				6.5 sec.			
Operator type	hydraulic bollards							
Control unit	PERSEO CBE 230.P SD							
Type of limit switch	reed magnetic sensor							
Impact resistance	20000 J							
Break-in proof	250000 J							
Manual cycle	reversible in the absence of voltage	release key		reversible in the absence of voltage		release key		
Frequency of use	3000 Op/gg							
Environmental conditions	from -40 °C to 60 °C							
Protection rating	IP67							

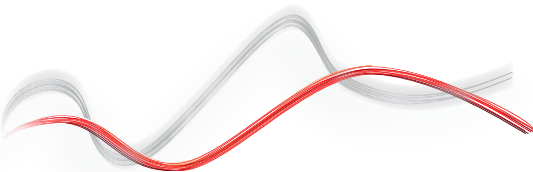

North branch - 0161 456 0456
South branch - 01488 674 750

info@bft.co.uk
www.bftautomationuk.com