




Be ahead

XPASS B





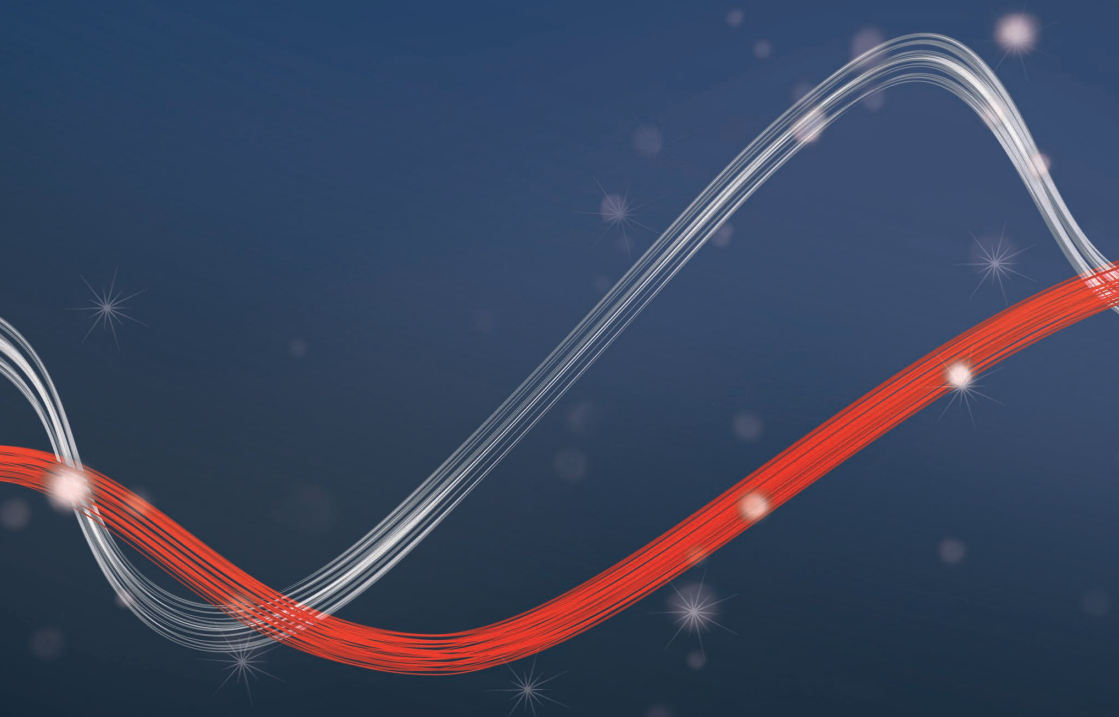

XPASS B



Anti-terrorism retractable bollard with hydraulic pump

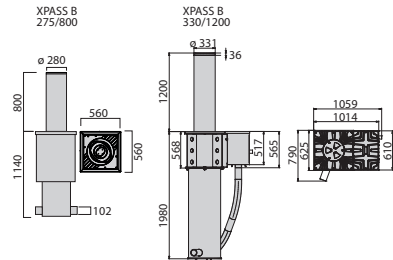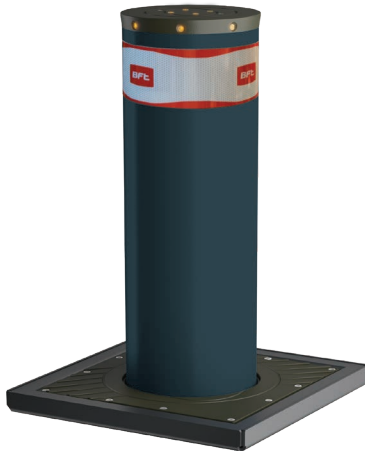

	XPASS B 275/800C L	XPASS B 275/800C LI	XPASS B 275/800C L SD	XPASS B 275/800C LI SD	XPASS B 330/1200 BODY L	XPASS B 330/1200 BODY LI	XPASS B 330/1200 HYDR. UNIT	XPASS B 330/1200 HYDR. UNIT + EFO
Voltage	230 V							
Rod height	800 mm				1200 mm			
Rod thickness	10 mm				25 mm			
Rod diameter	275				330			
Raise time	7 max sec.				5 max sec.		5 max (1.5 for emergency) sec.	
Lower time	4 sec.							
Rod treatment	ral 7015 painted steel and reflective film h: 100 mm	aisi304 or aisi316	ral 7015 painted steel and reflective film h: 100 mm	aisi304 or aisi316 stainless steel	ral 7015 painted steel and reflective film h: 100 mm	aisi304 or aisi316	ral 7015 painted steel and reflective film h: 100 mm	aisi304 or aisi316
Operator type	hydraulic bollards							
Control unit	PERSEO CBE 230.P SD				PERSEO CBE 230.P SD			
Break-in proof	667000 J				2100000 J			
Frequency of use	2000 Op/g							
Antiterrorism: reference standard	pas 68:2010 7500/50/n2				Iwa14-1:2013 v/7200(n3c)/80/90 single bollard installation			
Type of limit switch					reed magnetic sensor			
Manual cycle	reversible in the absence of voltage				reversible by means of mechanical key with no power			
Environmental conditions	from -40 °C to 60 °C							
Protection rating	IP67							



North branch - 0161 456 0456
South branch - 01488 674 750

info@bft.co.uk
www.bftautomationuk.com