

## Fixed Bollard 900mm Above Ground 48mm - 204mm Diameter Stainless Steel - Bolt Down




The stainless steel range of 900mm tall Fixed Bollards are suitable for a range of applications.

The round bollards are available in sizes from 48mm to 204mm diameter stainless steel grade 304 tube. The Fixed Bollard is available with extended legs for casting into concrete or a flange plate for bolting down.

The Stainless Steel Fixed Bollard is ideal for situations where a high quality aesthetically pleasing way to mark boundaries is required.

Removable versions also available.

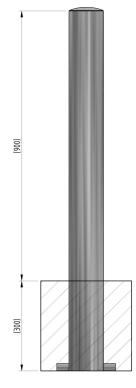

<u>Part Number</u>	Diameter and Fixing Detail	<u>Weight (kg</u>
138 125 049	48mm Stainless Steel Grade 304	3kg
138 125 060	60mm Stainless Steel Grade 304	3kg
138 125 075	76mm Stainless Steel Grade 304	4kg
138 125 090	89mm Stainless Steel Grade 304	5kg
138 125 104	101mm Stainless Steel Grade 304	6kg
138 125 117	114mm Stainless Steel Grade 304	7kg
138 125 123	129mm Stainless Steel Grade 304	7kg
138 125 142	139mm Stainless Steel Grade 304	8kg
138 125 157	154mm Stainless Steel Grade 304	9kg
138 125 169	168mm Stainless Steel Grade 304	10kg
138 125 201	204mm Stainless Steel Grade 304	12kg


## Product details

- 2mm wall thickness
- Concrete in 300mm (below ground)

- Round flange plate 5mm thick, diameter dependant on bollard diameter
- Flange plate diameter ranges from 120mm 305mm

## Installation & use Bolt down to a suitable concrete surface.

Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete. Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete. Products are guaranteed for 12 months (if installed and used correctly).

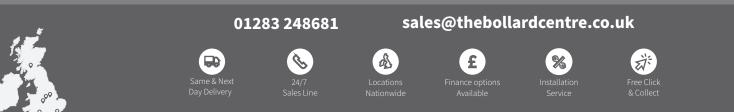

Bristol | Canvey | Glasgow | Nottingham | Tipton | Head Office in South Derbyshire